

**UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
02560028AA

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

SYSTEM, METHOD, AND APPARATUS FOR PORTABLE DESIGN, DEPLOYMENT, TEST, AND OPTIMIZATION OF A COMMUNICATION NETWORK

and invented by:

Theodore Rappaport, Brian T. Gold, Roger R. Skidmorejc875 U.S. PTO
09/628506If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Which is a:

☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Which is a:

☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 52 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
02560028AA

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
a. ☐ Formal b. ☒ Informal Number of Sheets 10
4. ☒ Oath or Declaration
a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
c. ☒ With Power of Attorney ☐ Without Power of Attorney
d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission *(if applicable, all must be included)*
a. ☐ Paper Copy
b. ☐ Computer Readable Copy
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & documents)*
9. ☐ 37 CFR 3.73(b) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
☐ First Class ☐ Express Mail *(Specify Label No.):* HAND DELIVERED

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
02560028AA

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures (please identify below):


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	50	- 20 =	30	x \$9.00	\$270.00
Irdep. Claims	3	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$345.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$615.00

- ☒ A check in the amount of **\$615.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **23-1951** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: July 28, 2000


Signature

Michael E. Whitham
Reg. no. 32, 635

McGuireWoods, LLP
Reston International Center
11800 Sunrise Valley Drive, Suite 900
Reston, VA 20191
(703)391-2510

cc:

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 C.F.R. §§1.9(f) and 1.27 (c)) - SMALL BUSINESS CONCERN

I hereby declare that I am

(check ☒ one) the owner of the small business concern identified below:

☒ an official of the small business concern empowered to act on behalf of the concern identified below;

NAME OF CONCERN Wireless Valley Communications, Inc.

ADDRESS OF CONCERN 104 Hybard Street, Blacksburg, Virginia 24060

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 C.F.R. §121.3-18, and reproduced in 37 C.F.R. §19(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled SYSTEM, METHOD, AND APPARATUS FOR PORTABLE DESIGN, DEPLOYMENT, TEST, AND OPTIMIZATION OF A COMMUNICATION NETWORK

By inventor(s) Theodore S. Rappaport, Brian T. Gold and Roger B. Skidmore described in:

(check one) ☒ the specification filed herewith,
☐ application Serial No. _____ filed _____
☐ Patent No. _____ issued _____

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 C.F.R. §1.9(d) or by any concern which would not qualify as a small business concern under 37 C.F.R. §1.9(d) or a nonprofit organization under 37 C.F.R. §1.9(e). *NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 C.F.R. §1.27)

NAME _____
ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

NAME _____
ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 C.F.R. § 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Theodore S. Rappaport
TITLE OF PERSON SIGNING President
ADDRESS OF PERSON SIGNING Wireless Valley Communications, Inc., 104 Hubbard Street,
Blacksburg, Virginia 24060

SIGNATURE [Signature] DATE JULY 28, 2000

LAW OFFICES
McGuireWoods, LLP
INTELLECTUAL PROPERTY LAW
11800 SUNRISE VALLEY DRIVE, SUITE 900
RESTON, VIRGINIA 20191

APPLICATION
FOR
UNITED STATES
LETTERS PATENT

Applicants: Theodore S. Rappaport, Brian T. Gold
and Roger R. Skidmore

For: SYSTEM, METHOD, AND APPARATUS FOR
PORTABLE DESIGN, DEPLOYMENT, TEST,
AND OPTIMIZATION OF A
COMMUNICATION NETWORK

Docket No.: 02560028AA

0088220" 90582960

**SYSTEM, METHOD, AND APPARATUS FOR PORTABLE
DESIGN, DEPLOYMENT, TEST, AND OPTIMIZATION OF A
COMMUNICATION NETWORK**

5

DESCRIPTION

BACKGROUND OF THE INVENTION

10

Field of the Invention

15

The invention generally relates to a miniature portable system for design, deployment, test, and optimization of a communications system, such as an indoor or campus-wide wireless or wired communication network. A handheld computing platform is used for the collection and display of communication signal properties, the manipulation of communication system components in a communications network design, and the prediction and optimization of communication systems during design, deployment, or maintenance operations.

20

Description of the Related Art

25

In recent years the use of wireless communication technology, such as cellular phone networks, has greatly increased. Moreover, it has become common to implement wireless communication systems within buildings or large facilities comprising several buildings. Examples of typical wireless communication systems are local area networks (LAN),

wide area networks (WAN), or cellular phone networks such as PBX, or local loops. Due to the increasingly diverse applications of wireless communication systems, system designs have become increasingly complicated and difficult to implement.

5 Common to all communication system designs, regardless of technology, size or scale, is the need for measurement data at some point in the design process. Whether in the initial design stage or the final verification stage, no communication system is implemented without the input of measurement data. However, measurement acquisition within
10 in-building environments is much more tedious and time consuming than in the macrocellular environment where measurement acquisition is carried out using Global Positioning System data to determine the location of the measurement being taken. Global Positioning System (GPS) data, which so many RF engineers have come to rely upon for outdoor
15 measurement acquisition, is not an option for microcell environments. Therefore, recording real-time measurement data within a building becomes a laborious, time-consuming task involving scratched notes and blueprints and manual data entry which are both expensive and ineffectual in many respects.

20 In addition to measuring RF signal properties from emitted base transceivers there is also a need to measure data throughput time in computer data networks. Throughput time is the time required to transfer a record or file of known size from one computer to another. In order to standardize the measurement of data throughput time for comparison or
25 verification purposes, files of a set size (e.g. 100K) are used and transferred in packet sizes such as 512 bytes. Similar to RF signal

attenuation, data throughput time is also a function of transmission distance and signal obstruction (e.g. walls, doors, partitions), as well as multipath propagation and the specific radio modem design.

Various signal property measurement acquisition tools and systems
5 have been developed to aid in the design of wireless communication systems such as PenCat™, Walkabout PCS™ and TEMS Light.

LCC International Inc. offers the PenCat™ as a pen-based collection and analysis tool for wireless communication design that runs on a small hand-held tablet computer. The PenCat™ system enables a
10 user to roam about a building, take signal property measurement data at a location in the building using a receiver linked to the tablet computer, and link the measured data to that building location on a computer map representing the building by tapping the appropriate portion of the map on the computer screen with a stylus pen. The building map can be entered
15 into the PenCat™ system by either scanning blueprints, sketching the building within the application, or importing from another source. PenCAT uses two dimensional bit maps to model the building environment.

Safco Technologies, Inc. offers the Walkabout PCS™ system as a
20 portable survey coverage system for use in indoor or outdoor wireless communication system design. Similar to PenCat™, the Walkabout PCS™ system utilizes a hand-held computer linked to a receiver for measuring signal properties at a given location and linking the measured property data to that location represented on a stored computer map. Also
25 similar to the Safco Walkabout is the Agilent 74XX indoor measurement system, which also uses a bitmap floor plan.

Ericsson Radio Quality Information Systems offers the TEMS Light system as a verification tool for wireless communication indoor coverage. The TEMS Light system utilizes a Windows-based graphical interface with two dimensional bit map drawings on a mobile computer
5 linked to a receiver to allow a user to view a stored building map, make location specific data measurements, and link the measured data to the represented location on the stored computer map. Unlike other in-building communication measurement systems, InFielder™ by Wireless Valley Communications, Inc. merges measurement data with periodic updates of
10 position location on a three-dimensional model of the physical environment. The InFielder™ product concept is disclosed in U.S. Patent Application Serial No. 09/221,985 filed December 29, 1998, and the contents of this application are herein incorporated by reference.

In addition to the above-discussed wireless communication
15 systems verification tools, various wireless communication system prediction tools have also been devised such as Wireless Valley Communications Incorporated's Predictor™ and Ericsson Radio Quality Information Systems' TEMS. Predictor™ allows a wireless
communication system designer to predict the coverage area of a particular
20 wireless system in a building or across multiple buildings. Predictor™ creates a computer simulation using a computer stored building or facility database and a defined transceiver location and type within the database. Based on the building configuration and building material properties defined in the database a prediction of the coverage area of the wireless
25 system is extrapolated by site-specific propagation whereby rays drawn between the transmitter and receiver and three-dimensional building

0092270-90922960

information are used for prediction computations. The TEMS system predicts indoor coverage of a wireless system based on a stored building map and input base transceiver locations and types using statistical radio coverage models.

5 While the above-mentioned design and verification tools have aided wireless system designers in creating indoor wireless communication systems using building drawings and linking data measurements to building drawings, none of the devices, except for InFielder™ and Predictor™, incorporate three-dimensional building
10 drawings to enhance the design process. Further, the above-mentioned devices and systems lack the ability to track a roving user while autonomously or passively measuring or collecting network performance data while uploading or downloading the data to a remote monitoring location. These capabilities may be required for installation and ongoing
15 monitoring and management of wireless devices for global network access.

 There have been recent innovations in the use of portable handheld computers as information collection devices for field maintenance and service. River Run Software has produced the OnSite software that uses a
20 Geographic Information System (GIS) to display street maps of a desired location. Using custom designed information gathering forms, OnSite allows a field operator to go directly to a location, gather information, and either return with that information or send the gathered data over a wired or wireless communications link to another computer. Autodesk, Inc. also
25 produces a software tool called OnSite that, although independent of River Run's OnSite, accomplishes a similar task. Autodesk's OnSite allows a

field operator to collect information in a remote setting using a GIS mapping engine and Oracle database software, and return with that information for record keeping, etc.

5 The River Run and Autodesk products are strictly outdoor field maintenance tools and only display two dimensional raster images to the user. These products do not address the complexities of the three dimensional world of in-building systems, which is significantly more difficult to model and visualize due to multiple stories or unique three dimensional features. Furthermore, these products only allow viewing and
10 retrieval, and do not permit on-site or remote adjustment and manipulation of modeled features.

SUMMARY OF THE INVENTION

15 According to the present invention, a system is provided for allowing a system designer to dynamically model a communications system electronically in any environment. The method includes the selection and placement of models of various communications system hardware components, such as hubs, routers, switches, antennas (point,
20 omnidirectional, directional, leaky feeder, distributed etc.), transceivers, amplifiers, cables, splitters, and the like, and allows the user to visualize, in three-dimensions, the effects of their placement and movement on overall system performance throughout the modeled environment. Thus, the placement of components can be refined and
25 fine-tuned prior to actual implementation of a system to ensure that all required regions of the desired service area are blanketed with adequate

RF coverage, data throughput, or system performance. The three-dimensional visualization of system performance provides system designers with tremendous insight into the functioning of the modeled communication system, and represents a marked improvement over
5 previous visualization techniques. Furthermore, the invention allows maintenance personnel to retrieve and inspect previous designs, or to rapidly locate components while in a particular location.

To accomplish the above, a 3-D model of the physical environment is stored as a CAD model in an electronic database. The
10 physical, electrical, and aesthetic parameters attributed to the various parts of the environment such as walls, floors, foliage, buildings, hills, and other obstacles that affect radio waves are also stored in the database. A representation of the 3-D environment is displayed on a computer screen for the designer to view. The designer may view the
15 entire environment in simulated 3-D, zoom in on a particular area of interest, or dynamically alter the viewing location and perspective to create a "fly-through" effect. Using a mouse or other input positioning device the designer may select and view various communication hardware device models from a series of pull-down menus. A variety of
20 amplifiers, cables, connectors, and other hardware devices may be selected, positioned, and interconnected in a similar fashion by the designer to form representations of complete communication systems.

A region of any shape or size may be selected anywhere within the displayed environment, or automatically selected based upon certain
25 criteria (e.g., selecting an entire building). The selected region is overlaid with a grid containing vertices of selectable size, shape, and

spacing to form a mesh or blanket. Each vertex corresponds to a single point within the 3-D environment. Thereafter, a communication system performance prediction model is run whereby the computer displays on the screen at each vertex of the mesh the predicted performance values, for instance, received signal strength intensity (RSSI), network throughput, packet latency, packet error rate, distributed power levels, quality of service, bit error rate, frame error rate, signal-to-interference ratio (SIR), and signal-to-noise ratio (SNR), provided by the communication system just designed. The display is such that the computer adjusts the elevation and/or coloring including characteristics such as saturation, hue, brightness, line type and width, transparency, surface texture, etc., of each vertex relative to the surrounding vertices to correspond to the calculated performance values. The coloring and elevation may correspond to the same calculated performance value or to different calculated performance values. For example, elevation may correspond to received signal strength intensity (RSSI), and color may correspond to signal-to-noise ratio (SNR), or any other of a variety of calculated performance parameters. The user is able to specify boundaries for this display in terms of selecting the range of elevations, colors, or other aesthetic characteristics from which the vertices of the mesh are assigned. Alternatively, the system can automatically select limits and ranges for the heights, colors, and other aesthetic characteristics. The result is a region of fluctuating color and elevation representing the changing wireless system performance throughout different portions of the modeled 3-D environment. The region may be viewed overlaid with the 3-D environment.

An important focus of this invention is the use of miniature, hand-held (e.g., Palm), portable computers which have been adapted to provide a technician with a display of all or a portion of a three dimensional model, allow for on-site manipulation of the model (e.g.,
5 adjustments as to choice of equipment, placement in the space, and orientation) to obtain performance prediction and other valuable information. These hand-held portable client computers also provide a measurement capability for measuring various communications performance parameters within the space which measurements can be
10 utilized either in the hand-held, portable client computers and/or be transmitted to one or several server computers, which may or may not be similar hand-held portable computers. During testing, actual performance values may be measured and entered into the hand-held computer (or gathered directly if the hand-held computer is equipped with an
15 appropriate measurement device) and either sent to one or more of the servers for display, logging, and tuning the prediction models or for use in the prediction models on board the hand-held computer. In addition, the hand-held portable client computers may be equipped with global positioning technology or other location equipment which allow the
20 technician to locate himself within a building or campus. Used in conjunction with the measurement features, the technician can have the portable hand held computer sample various measurements either overtly or passively in the background and have them paired to location information which will assist in modeling the space and making various
25 optimizing changes in the deployed system. Many other advantages in deploying, testing, and optimizing communication networks may be

achieved using the hand-held portable client computers, either alone or in combination with the server computers. Preferably, the hand-held portable client computers will allow for the selection of various buildings in a campus environment and display various floor plan layouts for multi-story buildings selected by the technician.

A method for representing sophisticated 3-D vector databases of buildings and campuses of buildings is described. With this system, a field technician can carry the hand-held computer into the field and use the displayed information to select placement of the components and build the physical communication system. Another advantage of the system is that field engineers can modify the plan while building the physical system. Modifications such as removing, adding, or editing positions or parameters of components can be entered into the hand-held computer acting as a client and can be transmitted to the server where an updated environment and prediction model can be calculated and sent back to the hand-held computer. Alternatively, calculations can be performed at the hand held computer, the modifications can be made, and the updated model can then be uploaded to the server. Thus, this system allows for bi-directional data flow between the client and server. Other data, such as measured or predicted network performance parameters, files, photographs, notes, and general information may be embedded or sent separately with the model.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, aspects and advantages will be better understood from the following detailed description of the preferred

embodiments of the invention with reference to the drawings, in which:

Figure 1 is a plan view of a portable, hand-held computer;

Figure 2 is a schematic view of a visual campus database to be displayed on the portable, hand-held computer;

5 Figure 3 is a schematic of the system of the present invention which includes at least one portable computer and at least one server computer which can exchange data and other information;

Figure 4 is a flow diagram showing the opening sequence used when obtaining files for use on the portable computer;

10 Figure 5 is a schematic diagram which illustrates the double buffering concept which is used to speed up the information displayed to the technician;

Figures 6a and 6b are display screens presented on the portable, hand-held computer which show editing of an antenna configuration in three dimensions;

15 Figure 7 shows the use of a translation handle to move a component such as a base station to a new location within a floor plan presented on the screen of the hand-held computer in 3-D;

Figure 8 shows the ability to alter the position and layout of a component such as a cable as it is displayed on a floor plan presented on the screen of the hand held computer;

20 Figure 9 is a schematic diagram illustrating the communication links between the portable handle client computer and the server computer; and

25 Figure 10 is a schematic diagram showing the portable hand held computer equipped with a measurement device.

**DETAILED DESCRIPTION OF THE PREFERRED
EMBODIMENTS OF THE INVENTION**

Using the present invention, it is now easier than ever to design,
5 deploy, test, optimize, and maintain communication networks in and
around multi-floored buildings, campuses of multi-floored buildings, and
environments including outdoor 3-D terrain. The present method is a
significant advance over the prior art in the breadth of information
presented to the user while operating a portable handheld computer. Using
10 the embodiment presented, an engineer can cover the complete cycle of
design, deployment, test, and maintenance for a communications network.

To facilitate navigation within a multi-floored building or campus
of multi-floored buildings or in an outdoor 3-D environment, the present
invention provides for a computer aided design (CAD) or other similar
15 system to assist in creating graphical drawings representing the building
system. Being able to smoothly navigate within a physical environment
including a building or campus of buildings is critical for the
aforementioned cycle of design, deployment, test, and maintenance of
communication networks. In a large system with complex network assets,
20 a sophisticated information management system is especially necessary
during the design and deployment and maintenance stages.

An exemplary embodiment of the invention runs on a portable
handheld computer. The current embodiment uses the Palm IIIC portable
handheld computing device, as shown in Figure 1, from Palm Computing
25 Inc, of Santa Clara, CA. One skilled in the art will see that many other
portable handheld computers could be used as hardware platforms while

staying within the spirit of the present invention. Some examples for other potential hardware platforms would be cellular phones, other personal digital assistants (PDAs) running the PalmOS operating system (OS) from Palm Computing, Inc. of Santa Clara, CA, Pocket PC s running the
5 Windows CE OS from Microsoft, Inc. of Redmond, WA, and in some cases larger pen tablet computers running a member of the Windows operating system family or another powerful OS such as Linux or Be.

The hand-held computer 10 is programmed to provide on the display 12 two-dimensional layouts and three-dimensional images of a
10 building or campus in which a communications network is or will be deployed. As an example of the type of software which could be used in the practice of this invention, Wireless Valley Communications, Inc. of Blacksburg, VA. markets a software product named SitePlanner® which is a tool suite that has computer aided design (CAD) facilities that can
15 provide the layout of buildings and 3-D terrain, insert morphological objects such as trees, shrubbery, or human populations, and place network components. In a preferred embodiment, a 3-D environmental database is created in SitePlanner® to model the physical environment under study, as disclosed in co-pending application Serial No. 09/218,841, filed on May
20 26, 1999, the complete contents of which is herein incorporated by reference. The resulting definition utilizes a specially formatted vector database comprising lines and polygons that represent physical objects within the environment. The arrangement of lines and polygons in the database corresponds to physical objects in the environment. For example,
25 a line or other shape in the database could represent a wall, a door, a tree, a building wall, or some other physical object in the modeled environment.

SitePlanner® has been designed as a wireless communications planning, design, test, and optimization tool suite. The powerful CAD facilities that SitePlanner uses to model buildings are not unlike the capabilities of most common CAD tools. As such, one skilled in the art could easily see how other CAD packages could be used to generate similar 3-D representations of multi-floored buildings and campuses of multi-floored buildings.

The current invention presents a method for compactly representing the database of physical objects within the environment. One novel aspect of the invention is the use of a 3-D environment database designed for a portable handheld computer. Current portable handheld computers lack the vast amounts of hard disk storage, random access memory (RAM), or processor speed common to desktop Personal Computers (PC s). The present invention provides a method for representing sophisticated 3-D vector databases of buildings and campuses of buildings in a compact space suited for a portable handheld computer system.

The term *vector* format is used here to mean a representation for a point in some logical space. In dealing with 3-D vector systems, three spatial coordinate axes, X, Y, and Z, are typically used to represent a point in space. The vector database specifies the boundaries of the vector space used, often giving a transformation matrix to convert points in the database vector space with a physical units system such as inches or meters. To represent lines, circles, or other compound shapes, a vector database uses sequences of vector points. For instance, a line in 3-D is usually specified with a starting point and ending point. Polygons are

typically specified as a set of 3-D vector points.

A *raster* format is drastically different from the vector format described above. In a raster database, every point in the specified space must be identified with a value. For instance, the most common type of raster database is the bitmap image, where the value of every point, or pixel, in the image is given. A raster representation is typically far less compact than a vector representation, and additionally is usually not easily scaled to show finer resolution details. Thus a vector database is preferable when dealing with a portable handheld computer with limited storage facilities.

SitePlanner® preferably uses the .dwg vector database format of Autocad, a product of Autodesk, Inc. of San Rafael, CA. The .dwg file format was not designed for use in a computer with limited storage or display capabilities, and so the present embodiment uses a file format termed Wireless Valley Communications Portable Database, or “WPD”. A “WPD” file is a file that is simply constructed so that storage space, bandwidth, and processor power need not be excessive. In a .dwg file, large floating-point numbers are used to specify coordinates in the vector space; however, a WPD file uses a simpler integer representation to specify the same coordinates. While the .dwg file does give more precision than would, given the limited display facilities of a portable handheld computer, the remarkable precision of .dwg is not required.

To compactly represent shapes such as lines, circles, and even text or contour surfaces, the WPD specification uses instruction commands known as *opcodes*, and associated instruction parameters termed *operands*. There are unique opcodes that tell the software reading the WPD file

5

10

25

which even apply compression techniques such as LZ77 and others. However, none of the prior art contemplates use on a portable handheld computer nor does previous art provide a measure for display of a three dimensional environment that includes integration of networking components, and communication system performance when providing remote monitoring through a server.

The present embodiment preferably exists in part as a module within the SitePlanner® tool suite. This module within SitePlanner® provides functionality so that a user can export a .dwg database of a 3-D environment into a compact WPD file which conserves memory and bandwidth when compared with .dwg and other drawing formats. To export a .dwg file, each building, tree, floor, plant, wall, elevator, etc. must be translated from the representation in a SitePlanner® .dwg file into the corresponding representation within the WPD file. Such a translation is preferably done using a look-up table (LUT) where representations in the .dwg format have a corresponding representation using WPD opcodes and operands. In the current embodiment, each building is exported into a unique WPD file. The exported file is ready to be packaged for use on a portable handheld computer.

In addition to fully supporting a vector format for representing a physical 3-D environment, the current embodiment supports users who only have raster images of the environment or building. To construct a 3D representation of a multi-floored building, a user may use a collection of 2-D raster images stacked together. While consuming considerably more memory, it has been found that many users do not have access to electronic CAD drawings of a building, and are forced to use scanned

blueprints or other raster images.

The present invention preferably employs a novel management feature termed the “visual campus database” to assist in organizing a campus of multi-floored buildings. Using the previously defined WPD format, a 2D pictorial representation, either vector or raster, can be used to display a campus of multi-floored buildings from a top-down view, as shown in Figure 2. When entering a building, the user views the display of the hand-held computer and taps or selects the pictorial representation of the desired building 14. In the present embodiment, a building hyperlink opcode is used to instruct the software in the hand-held computer where to find the WPD file associated with the selected building. Using a building hyperlink reduces memory usage and improves drawing time, two critical features for operation on a portable handheld computer.

15 In the current embodiment where a Palm IIIC portable handheld
computer is used, a Palm DataBase (PDB) header structure must be placed
at the top of each WPD file when it is first created. The PDB header tells
the PalmOS what the name of the database is, the type of database, the
application associated with the database, among other management
20 utilities. In the case of the current embodiment, each WPD file is assigned
a database type referred to as "WPDB" indicating Wireless Valley
Communications Portable DataBase. The creator ID, that is the
application associated with the WPD file, is given an alphanumeric tag
indicating it will be employed on the hand held computer. In the preferred
25 embodiment, a four letter tag is used for implementation on a Palm IIIC.

In the present embodiment, a WPD database, having had the PDB

header structure inserted, is given the extension .pdb. The .pdb file is then ready to be transferred from the desktop PC to the portable handheld computer and stored on the portable hand held computer. In the current embodiment, the transfer from desktop PC to portable handheld computer
5 uses the hotsync docking cradle accessory supplied with the Palm IIIC.

Referring now to Figure 3, the docking cradle 16 connects to the serial port of the PC 18, allowing for a transfer of Palm OS applications (.prc files) and databases (.pdb files) through the serial link 20. With the Palm IIIC secured in the docking cradle, a program supplied by Palm
10 Computing, Inc. of Santa Clara, CA is used to transfer the .pdb database. The use of the transferal program is transparent to the end-user, masked by a background application call from within SitePlanner®. The user then removes the portable handheld computer 10 from the docking cradle 16 and is ready to begin operating the hand held computer 10. Of course, it
15 will be understood by those of skill in the art, that information can be transmitted between the hand-held computer 10 and the PC 18 by means other than a serial link 20 (e.g., other wired or optical connections, wireless connections, etc.). In the present invention, the hand-held computer 10 serves as a “client” to the PC 18 which serves as “server”. In
20 the invention, there may be one or a plurality of clients and one or a plurality of servers. In addition, the clients and servers can transfer, store, and display information to and amongst each other by a variety of methodologies including electrical or optical link or wireless communication.

25 As shown in Figure 4, when the software is started at 22, the system checks to see if there are any present visual campus databases at

0092729-9052950

decision block 24. If there are no campus databases present, a list of single building databases is given at block 26. If a visual campus database was found and selected at block 28 (such as that shown in Figure 2), the user then graphically picks which building is to be entered at block 30.

5 The selected building database is then opened for reading at block 32. By default the first floor of the building is drawn on screen at block 34. Note the user may use the visual campus database to represent any large outdoor environment, such as a city or a coverage area typically served by macrocellular wireless systems.

10 In the present embodiment, only one floor of each building may be displayed at a time. However, it will be understood by those of skill in the art that 3-D visualizations could be used to provide more information to the user. A list of floors in the current building is preferably provided to the user in the Graphical User Interface (GUI) on the portable handheld
15 computer. As the user moves from one floor to another, the current floor may be selected from the list of floors.

The hand held computer and software can employ a method for drawing and storing the current floor known as double buffering, as shown in Figure 5. Double buffering involves drawing the current floor into an
20 off-screen buffer in memory 36. In the present embodiment, the off-screen buffer may be larger than the primary display 12 size. Thus, the current view, or viewport 38, occupies a smaller rectangle within the off-screen buffer 36. The viewport 38 always has the same or smaller resolution size as the primary display 12. Using double buffering reduces flicker and
25 apparent drawing times. To draw the active viewport 38 on the actual display screen 12, the Palm OS software development kit is used to copy

the data within the off-screen buffer into the display screen's buffer.

In the current embodiment, to pan around in a building floor, the user selects the pan button on the graphical user interface (GUI). Tapping on the screen and dragging the stylus around will cause the viewport 38 window location to change within the off-screen buffer 36. As the viewport coordinates change, the screen is updated by recopying the visible area onto the display. Zooming in and out of a drawing is implemented in a similar fashion. When the user selects a zoom tool button (either zoom in or zoom out) on the GUI and taps on the screen, the viewport window size is changed accordingly, and the screen is redrawn using the tapped location as the new center for the drawing. The maximum zoom level occurs when the viewport window is scaled such that the number of pixels in the display window matches the number of coordinate points in the WPD file contained within the active viewport window. User interface buttons 40 can be used to do the navigation described above. Alternatively, soft keys could be displayed on the screen of the portable computer 10 which would allow zoom and movement of the viewport 38.

20 The technique described above, as well as other comparable techniques, allows one to easily navigate within a complex system of multi-floored buildings.

Building material properties such as wall densities and material types, glass thickness, etc. or material manufacturer names and sources can be also embedded within the WPD file. When a building floor is viewed in the present embodiment, the user may select a building object and view the object's properties directly on the portable handheld computer 10. In

the current embodiment, to view the object's properties, the user preferably taps or clicks on the object and selects "Properties" from the Edit menu displayed hand-held computer 10. A new window, or "form" in Palm OS terminology, would then be displayed showing the embedded material properties, manufacturer information, etc. Clearly, alternative methods could be used to identify and indicate the materials property on the display screen of the hand held computer. The important feature is that in the system contemplated by this invention, the technician charged with deploying or optimizing the communications network is provided with a hand-held computer from which he can view the components contemplated for the system, and can, within his or her discretion select alternative components for use in the system and be provided with information showing the effects different materials selections will have on the system being deployed or optimized.

This system can also have embedded information specific to a communications network. For instance, attenuation properties of building objects can be stored within the database. In the present embodiment, a means for embedding communication network components within the WPD file has been specified. Components such as base stations, antennas, coaxial cable, twisted pair cable, fiber optic cable, telephone wiring, couplers, amplifiers, equalizers, hubs, switches, routers, firewalls, power distribution components, and more can all be specified within SitePlanner®, and be exported in a WPD file as disclosed herein, and viewed using the hand held computer 10.

Preferably, the user can manage all network specific assets using a bill of materials from SitePlanner® as specified in pending application

09/318,842 filed May 26, 1999, the complete contents of which is herein incorporated by reference. In addition, asset management data such as physical condition, installation cost, component cost, depreciation, maintenance schedules, and important facilities management information may be stored and displayed. To view bill of materials information on the portable handheld computer 10, the embedded network components and their physical locations within the environment are extracted from the WPD file and linked into a list of assets. In the present embodiment, the user may view the list of assets by selecting View BOM within the “Tools” menu item on the hand held computer 10. A list of all the network components is displayed along with part information such as price, manufacturer, and performance characteristics. Simultaneously, the user may view the location of all such components within a 2-D or 3-D representation of the environment.

In addition to being able to display and manage a communication system’s components, the present invention allows field engineers to modify a system’s configuration while operating within the building or campus of buildings. Modifications such as removing, adding, or editing locations, positions or parameters of components are supported in the present embodiment. To remove a network component, the user simply taps or clicks once to select the object, and then specifies Remove Object from the Edit menu. To add a component, the user selects the Add Object from the Edit menu. A series of window dialogs, or forms, guides the user through the selection of a network component. The first few forms specify the general class of object such as wireless equipment, wired telephony component, optical fiber asset, etc. Later forms, based on the

general class of component selected, vary such that specific information can be entered. For instance, in a wireless communications system, a base station may be placed within the active floor. In the same system, an antenna or cabling system can be placed to connect with the base station.

5 Once components have been added to the building system, or if components already exist, the user may edit the configuration, layout, and properties of an object. To edit the network component properties, the user may tap or click on the object twice in succession, or, having tapped or clicked on the object once, choose the Properties command within the
10 Edit menu. A list of the current objects' properties is displayed.

Where possible, the user may edit the object's configuration or properties. For instance, an antenna system may have a certain rotation in three dimensions. A preferred embodiment allows the user to specify a new rotation and orientation by choosing rotation angles from each of the
15 three primary spatial axes, all while displaying the antenna system in a wireframe 3-D view, as shown in Figures 6a and 6b. Specifically, Figure 6a shows a three dimensional view where soft keys "x", "y" and "z" are used to edit the antenna configuration, and Figure 6b shows two 2D views with the soft keys "x", "y" and "z" being used to edit the antenna's
20 configuration.

Other components may also be edited or moved throughout the displayed environment depending on the changeable parameters available for the selected object. The technique for making these edits will depend on the software being used on the portable computer 10. An important
25 feature of this invention is that the technician is permitted to make changes in parameters, components, locations, and orientations of components, on

the fly at the site of installation for the communications network, while having the ability to communicate with a server with a wireless or wired link for updates to the environmental model. The portable handheld computer also stores and displays the updated environment model and the changed network configuration. Preferably, the technician will be provided with immediate information at the hand held computer based on prediction models being loaded thereon that will predict the effects of the modifications imposed or suggested by the technician. Alternatively, this computation could be performed at the server wherein the hand held computer uploads the information, computations are performed, and the server downloads the results to the client computer. The modifications can be uploaded to one or more server computers, or they may be transmitted to other portable, hand-held client computers (one might have a plurality of hand-held client computers in the system, for example, if several engineers are working at optimizing and/or deploying the communications network at the same site.

Nearly all objects may be moved while viewing the building floor in the present embodiment. Referring now to Figure 7, there is shown a communications component 42 positioned at a location on a floor of a building, with the floor plan shown generally as 44. To move the component 42, the user selects the desired object by tapping or clicking on the object's drawn location. Depending on the type of component 42, a set of modification or translation handles are presented. All objects will have translation handles used to move the component within the drawing while keeping the current orientation and layout. For instance, when a base station (component 42) is selected, a box 46 with an X inside can be

displayed next to the base station. The user may click or tap on the box 46 and drag the pointing device around to specify a new location for the base station. Other components work in an identical fashion for merely translating the object.

5 Some components may be re-oriented on the display screen. For example, a cable system may be altered in the manner it is routed within a building. As shown in Figure 8, the user can be shown a solid box 48 at each vertex of the cable system 50. Tapping or clicking on the solid box and dragging the pointing device around causes the vertex location to
10 change. For illustrative purposes, Figure 8 shows the translation handle 52 connected to vertex 54 of the cable which will allow this vertex to be moved from the wall 56. The end of the cable 50 is connected to component 58 which can also be moved as described above in connection with Figure 7. In a preferred embodiment, the user may additionally select
15 a Force Size constraints option with the Options menu to force any changes to a cable system to use the existing lengths of cable. Other techniques may also be used for addressing the movement and/or repositioning of cables and the like. An important feature of this invention is that the cable position, or “proposed” cable position, is identified to the
20 technician on his or her portable hand held computer, and he or she may re-position the cable into alternative positions based on his or her on-site assessment of the building or other structure or geographical area in which the cable will be located. As discussed in conjunction with Figure 7, and Figures 6a and 6b, this invention allows both the location and orientation
25 to be altered on-site in a similar fashion, and still further, the invention allows for the selection of diverse components (e.g., selection of a

particular type of antenna from a schedule of several different antennas) for installation at the site, with all of these selections being made possible at the site by the technician, and the technician is provided with immediate feedback on how these changes will affect the overall communications system. Examples of the types of components which are used in practice and which might be modeled within the practice of this invention include base stations, base station controllers, amplifiers, attenuators, antennas, coaxial cabling, fiber optic cabling, connectors, splitters, repeaters, couplers, leaky feeder cables, hubs, switches, routers, firewalls, power distribution lines, copper wiring, twisted pair cabling, and wireless access points. In addition, transducers and converters such as devices that convert optical signals to RF or baseband signals might be modeled. The portable computer/server combination may also track the cost and performance criteria (i.e., a bill of materials) for various components selected by or substituted by the engineer using the hand held computer, such that a complete listing and display of charges and performance can be obtained during the design, deployment or optimization processes.

Existing software systems may allow a user to view communications network systems. However, prior to this invention, no prior art system allowed the management described above to occur on a portable hand-held computer. This invention is the first to recognize that portable hand held computer systems can be used to store and present three dimensional representations of buildings, campus areas, topography of geographic terrain, etc., and to allow these displayed systems to be modified on the fly, with immediate computational feedback from downloaded models, thereby permitting the fast and efficient deployment

and optimization of communications networks.

With reference to Figures 2 and 4-8, it can be seen that the present invention contemplates that multiple floor plans may be stored either on the portable computer or server (in which case the portable computer can retrieve these plans from the server), and that these floor plans can be displayed on the portable computer (either in 2-D or 3-D). The engineer will be able to select among one or more buildings (as shown in Figure 2), and then be able to display the floor plan for specific floors in a multi-story building selected (or the floor plan for a single story building) on the display of the portable computer. As shown in Figure 5, the engineer can then selectively display different portions of the floor plan by moving the view port. It should be understood that these techniques can be used in any physical environment which is modeled in a three-dimensional model (e.g., topographical terrain, etc.).

The WPD file format contemplated herein is capable of representing the complete building and network database information. In the present embodiment, when a user adds, removes, or modifies a network component configuration and uploads this information to a computer running SitePlanner®, the SitePlanner® software can completely reconstruct and store a .dwg file with all the necessary data such that the user may use the SitePlanner® tools to further a design on the desktop PC. To reconstruct the .dwg file within SitePlanner® the process for exporting the WPD file is reversed. That is, the look-up table (LUT) described previously is reversed, and opcodes and operands contained in the WPD files are translated into the .dwg representations.

In one embodiment, to upload WPD database files from the

portable handheld computer onto a server which could be a desktop PC, the user places the portable handheld computer into the docking cradle attached to the desktop PC. Extensions made to the SitePlanner tool suite guide the user through the import process. The WPD database files
5 contained on the portable handheld computer are queried, that is, the desktop PC software requests a list of database files marked as type WPDB as discussed previously. The list returned is presented to the user for selection. In the current embodiment, the databases selected by the user are transferred from the portable handheld computer onto the desktop
10 PC via the serial port interface. Using the aforementioned translation process, .dwg files are reconstructed for each WPD file transferred.

In addition to being able to transfer, display and store data between the portable hand-held client and other client or server computers via a serial port interface (the serial port 60 being shown in Figure 1), the
15 present invention also contemplates a novel method for transferring, storing and displaying data in the field over a wired or wireless network medium, as shown in Figure 9. Using such a method, the field engineer may communicate design changes back to a desktop PC 100 running SitePlanner® or some other capable software for other engineers to
20 examine in real-time or off-line. To minimize the quantity of transferred data, a method of tracking revision changes could be employed. Preferably, the WPD file format employs change-tracking opcodes, such that only the data marked as changed needs to be sent over the communication link. When the user opens a communication link to a
25 desktop PC 100 running SitePlanner® or some other capable software, a copy of the WPD file is stored locally to the desktop PC 100 such that any

changes made using the portable handheld computer 102 will be merged into the copy stored locally on the desktop PC 100. Other users may not modify the database files on the desktop PC while the communication link remains open, preventing multiple users from making changes to the file at once.

It is also possible, and preferable to have the facility of allowing a mobile user to communicate site-specific information back to a central server or repository. Autodesk, Inc. has developed the OnSite technology that allows a field technician to carry a portable handheld computer into the field and visualize a Geographic Information System (GIS) database of street maps. The field technician may then place survey information within the database and transmit the information to a server over a wired or wireless link. The present embodiment extends this concept significantly in that the current invention allows for 3-D physical environment information to be sent into the field, and also allows for complex communications network information and measured and predicted performance data to be viewed, manipulated, stored and transmitted back to another computer over a wired to wireless link. In the preferred embodiment, a position-tracking device may be attached to or incorporated in the portable handheld computer 102 so that a user's movements within the environment may be tracked and displayed. Using such a system, a field technician will know precise location information while navigating through an environment. Some examples of position-tracking devices include Global Positioning System (GPS) antennas, laser range finder scanners, tilt sensor based dead-reckoning systems, or some other positioning device known now or in the future. Interface boxes 104

and 106 allow this information, as well as other data, to be transmitted between the portable hand held computer 102 and the server computer 100. For example, after the technician makes changes on the portable hand held computer 102, this information could be used to update the computerized model of the communications network on the server 100. Alternatively, files of building information, equipment information, etc., might be retrieved from the server 100 by the portable hand held computer 102 on an as needed basis.

There are many computer aided design (CAD) products on the market that can be used to design a computerized model of a communications network. Some of the major prediction and simulation tools available are: WiSE from Lucent Technology, Inc., SignalPro from EDX, PLAnet by Mobile Systems International, Inc., TEMS from Ericsson, Virtutech Simics, CACI Products Co.'s COMNET Predictor, Scientific and Engineering Software, Inc.'s SES/Strategizer, and Make System, Inc.'s NetMaker XA. In a preferred embodiment, SitePlanner® from Wireless Valley Communications, Inc. is used as a CAD tool to predict performance of a communications network system; however it should be understood that other design tools may also be used in the practice of this invention.

With advancements in portable handheld computing power, enhanced prediction and simulation capabilities may be possible on a portable handheld computer. The desktop PC running SitePlanner® or some other prediction software could additionally be a collection of computers used in parallel to improve calculation speed. In the present embodiment, the software on the portable handheld computer can send

environmental information contained in a WPD database to multiple computers running SitePlanner® in parallel. Using a simulation or prediction tool such as SitePlanner to model the communications environment, the present invention allows simulation or prediction data to be communicated from a desktop PC or server PCs to the field engineer a portable handheld computer. In the present embodiment, the communication of simulation or prediction data may occur through the docking cradle connection, or over the aforementioned wired or wireless network connection. The prediction or simulation data is embedded directly within the WPD database files, and then stored and displayed on the portable handheld computer, as discussed in the WPD specification.

Using the present invention, a user may view simulation or prediction data within the building database map on the portable handheld computer. Simulation or prediction data may be represented as signal strength, network throughput, bit error rate, packet error rate, packet latency, power consumption, or some other measurement metric known now or in the future. Simulation or prediction data may be viewed either as an overlaid grid of data points, as a set of contours identifying equal performance, as an instant point where a simulated user is tracked within the building to indicate communications performance, or some other display method known now or in the future. Examples of several network performance visualization methods are covered in pending application 09/352,678 filed July 14, 1999, the complete contents of which is herein incorporated by reference.

Regardless of communication system complexity or scale, measurement data is generally required to validate the communication

system design and operation, and to verify proper performance over time. Many tools exist on the market today for validating the performance of communications networks. Hardware and software products for verifying wireless communications include, but are certainly not limited to, TEMS Light from Ericsson, the Agilent Technologies, Inc. Indoor Wireless Measurement System, the Wireless Valley Communications, Inc. InFielder™ component within SitePlanner®, the SAFCO Walkabout®, and the Qualcomm Retriever. Countless tools for monitoring wired network performance exist. Examples include the NetSys Performance Tool, IBM's NetView, HP's OpenView, the Fluke OneTouch Network Assistant, and many more. None of the above-mentioned products, except for InFielder™, have the ability to remotely monitor network performance while merging performance data with exact physical locations and electrical specifications of the components that make up the network under test. While InFielder™ can be used to measure network performance between a client and a server, InFielder™ does not provide a means for transferring collected measurement data to another computer in a real-time or store-and-forward manner. In hand-held devices, where display capabilities and memory size may be severely limited, it is vital to have a real-time or near real-time transfer mechanism that allows measured data from the hand held client to be off-loaded to a server before the memory of the hand held device is filled. At the server, the received data may be archived, displayed, used for remote engineering monitoring of system health, or used for analysis. The received data may also be stored and displayed at the originating hand held device provided there is sufficient memory.

5

25

technician to enter a site and actively report their location while collecting data. Referring now to Figure 10, in the present invention, a user operating a portable hand-held computer 300 may attach a communication system measurement device, such as a wired or wireless network transceiver, a cable integrity tester, a signal quality measurement device, a bit error rate or data throughput detector, or some other measurement tool 302 known now or in the future. In the present embodiment, specific examples of measurement devices that may be attached include, but are not limited to, the ZK-Celltest SAM with cellular phone, the Wireless Valley Communications, Inc. WaveSpy radio scanner, the Anritsu SiteMaster MS2711 handheld spectrum analyzer, a Berkeley Varitronics Systems, Inc. Fox radio receiver, and a wireless Palm Modem. The measurement tool may be connected by an interface cable 304 to the interface port 60, or by other suitable wired or wireless connection.

Having connected a communication measurement device 302 to a portable handheld computer 300, the preferred embodiment will guide the engineer through a series of steps before beginning measurement collection with the communications device. The user should input specific device parameters so that the measurement device may be set up properly. Some measurement equipment devices have real-time interfaces, where the portable handheld computer can interface directly to the measurement device and potentially directly select options and parameters for the measurement equipment. Other measurement devices require the user to select options manually with an interface on the device itself. If a real-time interface is present on the measurement device 302, the options and parameters pertaining to the selected measurement device may be

transmitted over the communications link between the portable handheld computer and the measurement device. In another embodiment, as is shown in Figure 10, an RS-232 serial interface cable 304 is used to connect the portable handheld computer 300 with the measurement device 302; however, one skilled in the art would observe that other communications links could be used such as USB serial, FireWire, a BlueTooth wireless system, or some other communications link known now or in the future could also be employed. In the embodiment shown in Figure 10, RS-232 serial communications are preferably managed using the Palm OS's New Serial Manager specified as part of the Palm OS Programmers Companion. The New Serial Manager handles low-level implementation details for communications between the software running on the portable computer 300 and the serial port on the portable handheld computer 300. The Palm OS software development kit implements function calls to send data over the serial port using the New Serial Manager. Further details on the Palm OS New Serial Manager and how PalmFielder uses the serial connection are detailed as part of the Palm OS software development kit reference document. Once a measurement device has been connected to the portable handheld computer and the user has specified the desired options and parameters for the device, data collection and remote monitoring by another server or client may begin. When using a measurement device equipped with a real-time interface, data collection can be performed in the background while the user navigates within the building or places the measurement device in a fixed location. With some measurement devices, data will be stored in the WPD file at all times using a time or position code to indicate when or where the

data was collected. The WPD specification indicates how measurement data is stored in a WPD file.

As disclosed in the co-pending application 09/221,985, the complete contents of which has been incorporated by reference, the user may input the current location into the portable hand-held computer 300 using several methods. In a marker mode, the user taps or clicks at the current location and a single measurement is made using the attached testing device. In a track mode, the user indicates the current position by clicking or tapping on the display, then walking in a straight line at constant velocity, and then clicking or tapping to indicate the stopping position. The data collected during the traveling period may then be averaged according to user specified options and stored within the database at evenly distributed points along the path either by using a set time interval or unit distance.

In an "Auto" mode, the user attaches a position-tracking device such as a GPS antenna, a laser range finder, a tilt sensor based dead-reckoning system, or some other tracking device that can detect position or change in position or motion known now or in the future. As the field user moves around in the environment, measurements collected from a receiver are correlated with position information collected from the attached tracking device. Such a system can be used to record large amounts of data with minimal user interaction needed. As a user of the hand held client collects measurement data within the environment, the collected data may be transmitted in real-time or near real-time to a remote server computer or another client, and the measured data is then displayed on a 3D model of the environment at the remote computer. The data is also

logged and processed at the remote computer for archiving and analysis.

Measurement data stored in the WPD file can be displayed directly on the building map by using a colored or patterned marker such as a circle, rectangle, asterisk, or some other shape at the position the data was recorded. In the case where prediction or simulation data is also available for the building, the user preferably may choose to display the prediction or simulation data along side actual measurements. The current embodiment also allows the user to show markers and statistics directly on the building drawing indicating differences between predicted or simulated data and actual measurement data.

An important component of the SitePlanner® tool suite is the Optimatic® module, where measurement data is used to optimize both the prediction model and the prediction model parameters. The portable system contemplated by this invention can be adapted to be used to optimize the prediction model and prediction model parameters on-site on the fly at the discretion of the engineer. Figure 9 shows a system for transferring measurement data over a wired or wireless communications medium. Using the communication link mentioned previously, where a desktop PC server running SitePlanner® or other capable software is connected via a wired or wireless communications medium, the collected measurement data may be sent to the desktop PC for optimization of the prediction or simulation model or model parameters. Once the desktop PC has optimized the prediction or simulation model or model parameters, updated predictions are made, and the new predictions are sent back to the portable handheld computer over the aforementioned communications link. Given more processing power on the portable handheld computer,

optimizations could take place directly on the portable handheld computer.

The system of this invention preferably allows for management of a measurement campaign within a given environment. If several field technicians collect measurement data using the present invention system, each user may exchange the data collected with other users in the field. Alternatively, unmanned operation of the present invention could be employed. Such a system facilitates the management of an ongoing measurement campaign by effectively allowing measurement collection to operate in parallel. To upload measurement data collected in the field, the aforementioned wired or wireless link is used to send data from the portable handheld computer to other portable handheld computers in the field or to desktop PCs elsewhere.

Using the present invention, a field engineer is capable of completing the entire design, deployment, test, optimization, and maintenance cycle required to implement successful communications networks. Representing a significant advance over the prior art, an exemplary embodiment allows the engineer to remain in the field while deploying the communications network, making measurements within the network, receiving optimized predictions on the performance of the network, re-configuring the communications network and associated components, and repeating the entire cycle to achieve maximum possible performance with minimal required time or effort.

While the invention has been described in terms of its preferred
embodiments, those skilled in the art will recognize that the invention can
25 be practiced with considerable variation within the scope of the appended
claims.

02560028AA

40

Overall sample		Non-union		Union		
	Mean	SD	Mean	SD	Mean	SD
Demographics						
Age	34.4	10.4	34.4	10.4	34.4	10.4
Gender	50%		50%		50%	
Marital status	50%		50%		50%	
Employment status	50%		50%		50%	
Income	50%		50%		50%	
Education	50%		50%		50%	
Health status	50%		50%		50%	
Work status	50%		50%		50%	
Job satisfaction	50%		50%		50%	
Organizational commitment	50%		50%		50%	
Turnover intention	50%		50%		50%	
Job performance	50%		50%		50%	
Organizational citizenship behavior	50%		50%		50%	
Work engagement	50%		50%		50%	
Job stress	50%		50%		50%	
Work-life balance	50%		50%		50%	
Job security	50%		50%		50%	
Job autonomy	50%		50%		50%	
Job variety	50%		50%		50%	
Job challenge	50%		50%		50%	
Job responsibility	50%		50%		50%	
Job interest	50%		50%		50%	
Job satisfaction	50%		50%		50%	
Organizational commitment	50%		50%		50%	
Turnover intention	50%		50%		50%	
Job performance	50%		50%		50%	
Organizational citizenship behavior	50%		50%		50%	
Work engagement	50%		50%		50%	
Job stress	50%		50%		50%	
Work-life balance	50%		50%		50%	
Job security	50%		50%		50%	
Job autonomy	50%		50%		50%	
Job variety	50%		50%		50%	
Job challenge	50%		50%		50%	
Job responsibility	50%		50%		50%	
Job interest	50%		50%		50%	

CLAIMS

We claim:

- 1 1. A computerized system for designing, deploying, modifying, or
2 maintaining a communications network, comprising:
3 a computer generated model of a physical environment in which
4 said communications network is or will be deployed, said computer
5 generated model providing a three-dimensional representation of locations
6 of components within said physical environment;
7 a server computer or computers for running a computer program
8 which generates said computer generated model;
9 at least one portable computer which acts as a client to said server;
10 means for downloading and storing at least a portion of said
11 computer generated model from said server to said portable computer for
12 displaying said three dimensional representation on said portable
13 computer; and
14 a display associated with said portable computer for displaying said
15 three dimensional pictorial representation.
- 1 2. The computerized system of claim 1 wherein said portable computer is
2 a hand-held computer.
- 1 3. The computerized system of claim 1 wherein said three-dimensional
2 representation is constructed from a collection of two-dimensional
3 representations.

1 4. The computerized system of claim 1 wherein said physical environment
2 is a building and said three dimensional representation includes at least
3 one floor plan of said building.

5. The computerized system of claim 4 wherein said three dimensional representation includes a plurality of floor plans for a plurality of floors in said building, and wherein said portable computer includes a means for selecting specific floor plans of said plurality for displaying on said display.

6. The computerized system of claim 1 wherein said physical environment is a campus of buildings and said three dimensional representation includes at least one floor plan for each of a plurality of buildings in said campus, and wherein said portable computer includes a means to select a building within said campus of buildings and to display said at least one floor plan for said building selected.

1 7. The computerized system of claim 6 wherein said three dimensional
2 representation includes a plurality of floor plans for a plurality of floors for
3 said building selected.

8. The computerized system of claim 1 wherein said components are selected from the group consisting of base stations, base station controllers, amplifiers, attenuators, antennas, coaxial cabling, fiber optic cabling, connectors, splitters, repeaters, transducers, converters, couplers,

5 leaky feeder cables, hubs, switches, routers, firewalls, power distribution
6 lines, copper wiring, twisted pair cabling, and wireless access points.

1 9. The computerized system of claim 1 wherein said communications
2 network includes wireless communication devices.

1 10. The computerized system of claim 1 wherein said physical
2 environment is an outdoor area having three dimensional topology and
3 said three dimensional representation includes a representation of said
4 three dimensional topology.

1 11. The computerized system of claim 1 wherein a position-tracking
2 device is used to determine position within said physical environment.

1 12. The computerized system of claim 1 wherein said communication
2 network components are maintained in a bill of materials.

1 13. A computerized system for designing, deploying, modifying, or
2 maintaining a communications network, comprising:
3 a computer generated model of a physical environment in which
4 said communications network is or will be deployed, said computer
5 generated model providing a representation of locations of components
6 within said physical environment, and wherein said computer generated
7 model provides for performance prediction of said communications
8 network based on factors selected from the group consisting of choice of
9 components to be used within said environment, choice of locations for

10 said components with said environment, and orientation of said
11 components at said locations;
12 a server computer or computers for running a computer program
13 which generates said computer generated model;
14 at least one portable computer which acts as a client to said server;
15 means for downloading and storing at least a portion of said
16 computer generated model from said server to said portable computer for
17 displaying said representation on said portable computer; and
18 a display associated with said portable computer for displaying said
19 representation and said performance prediction results.

1 14. The computerized system of claim 13 further comprising:
2 a means for inputting changes to said factors for said at least a
3 portion of said computer generated model on said portable computer
4 which is downloaded from said server; and
5 a means for uploading said changes to said server.

1 15. The computerized system of claim 13 further comprising:
2 a means for inputting changes to said factors for said at least a
3 portion of said computer generated model on said portable computer
4 which is downloaded from said server; and
5 a means for outputting predicted performance parameters of said
6 communications network based on said inputted changes on said display
7 of said portable computer.

1 16. The computerized system of claim 13 wherein said communications

2 network includes wireless communication devices.

1 17. The computerized system of claim 13 wherein said portable computer
2 is a hand-held computer.

1 18. The computerized system of claim 13 wherein said representation is
2 three-dimensional.

1 19. The computerized system of claim 13 wherein said representation is
2 constructed from a collection of two-dimensional representations.

1 20. The computerized system of claim 13 wherein said physical
2 environment is a building and said representation includes at least one
3 floor plan of said building.

21. The computerized system of claim 20 wherein said representation
includes a plurality of floor plans for a plurality of floors in said building,
and wherein said portable computer includes a means for selecting specific
floor plans of said plurality for displaying on said display.

22. The computerized system of claim 13 wherein said physical environment is a campus of buildings and said representation includes at least one floor plan for each of a plurality of buildings in said campus, and wherein said portable computer includes a means to select a building within said campus of buildings and to display said at least one floor plan for said building selected.

23. The computerized system of claim 22 wherein said pictorial
representation includes a plurality of floor plans for a plurality of floors for
said building selected.

24. The computerized system of claim 13 wherein said components are selected from the group consisting of base stations, base station controllers, amplifiers, attenuators, antennas, coaxial cabling, fiber optic cabling, connectors, splitters, repeaters, transducers, converters, couplers, leaky feeder cables, hubs, switches, routers, firewalls, power distribution lines, copper wiring, twisted pair cabling, and wireless access points.

25. The computerized system of claim 13 wherein said physical
environment is an outdoor area having three dimensional topology and
said pictorial representation includes a representation of said three
dimensional topology.

1 26. The computerized system of claim 13 wherein a position-tracking
2 device is used to determine position within said physical environment.

27. The computerized system of claim 13 wherein said communication
network components are maintained in a bill of materials.

28. A computerized system for designing, deploying, modifying, or
maintaining a communications network, comprising:
a computer generated model of a physical environment in which

4 said communications network is or will be deployed, said computer
5 generated model providing a representation of locations of components
6 within said physical environment;
7 a server computer or computers for running a computer program
8 which generates said computer generated model;
9 at least one portable computer which acts as a client to said server;
10 means for downloading and storing at least a portion of said
11 computer generated model from said server to said portable computer for
12 displaying said representation on said portable computer;
13 a display associated with said portable computer for displaying said
14 representation;
15 a means for measuring performance measurements within said
16 physical environment associated with said portable computer and for
17 inputting performance measurements into said portion of said computer
18 generated model in said portable computer.

1 29. The computerized system of claim 28 further comprising a means for
2 uploading said performance measurements from said portable computer to
3 said server.

1 30. The computerized system of claim 29 wherein said means for
2 measuring is a measurement device connected to said portable computer.

1 31. The computerized system of claim 28 further comprising a means for
2 downloading said performance measurements from said server computer
3 to said portable computer.

1 32. The computerized system of claim 28 further comprising a means for
2 uploading and downloading said performance measurements from said
3 portable computer to another computer which is different from said server.

1 33. The computerized system of claim 32 wherein said means for
2 measuring is a measurement device connected to said portable computer.

1 34. The computerized system of claim 28 further comprising:
2 a means for inputting changes to at least a portion of said computer
3 generated model on said portable computer which is downloaded from
4 said server, said means for inputting being positioned on said portable
5 computer; and
6 a means for uploading said changes to said server.

1 35. The computerized system of claim 28 further comprising:
2 a means for inputting changes to at least a portion of said computer
3 generated model on said portable computer which is downloaded from
4 said server, said means for inputting being positioned on said portable
5 computer; and
6 a means for outputting predicted performance parameters of said
7 communications network based on said inputted changes on said display
8 of said personal computer.

1 36. The computerized system of claim 28 wherein said communications
2 network includes wireless communication devices.

09623506-072000

1 37. The computerized system of claim 28 wherein said portable computer
2 is a hand-held computer.

1 38. The computerized system of claim 28 wherein said representation is
2 three dimensional.

1 39. The computerized system of claim 38 wherein said representation is
2 constructed from a series of two dimensional representations.

1 40. The computerized system of claim 28 wherein said physical
2 environment is a building and said pictorial representation includes at least
3 one floor plan of said building.

1 41. The computerized system of claim 40 wherein said representation
2 includes a plurality of floor plans for a plurality of floors in said building,
3 and wherein said portable computer includes a means for selecting specific
4 floor plans of said plurality for displaying on said display.

1 42. The computerized system of claim 28 wherein said physical
2 environment is a campus of buildings and said representation includes at
3 least one floor plan for each of a plurality of buildings in said campus, and
4 wherein said portable computer includes a means to select a building
5 within said campus of buildings and to display said at least one floor plan
6 for said building selected.

00000000-00000000

1 43. The computerized system of claim 40 wherein said representation
2 includes a plurality of floor plans for a plurality of floors for said building
3 selected.

1 44. The computerized system of claim 28 wherein said components are
2 selected from the group consisting of base stations, base station
3 controllers, amplifiers, attenuators, antennas, coaxial cabling, fiber optic
4 cabling, connectors, splitters, repeaters, transducers, converters, couplers,
5 leaky feeder cables, hubs, switches, routers, firewalls, power distribution
6 lines, copper wiring, twisted pair cabling, and wireless access points.

1 45. The computerized system of claim 28 wherein said physical
2 environment is an outdoor area having three dimensional topology and
3 said representation includes a representation of said three dimensional
4 topology.

1 46. The computerized system of claim 28 further comprising a position-
2 tracking device used to determine position within said physical
3 environment.

1 47. The computerized system of claim 28 wherein said communication
2 network components are maintained in a bill of materials.

1 48. The computerized system of claim 28 further comprising:
2 a means for inputting changes to at least a portion of said computer
3 generated model on said portable computer which is downloaded from

09628506-072800

4 said server, said means for inputting being positioned on said portable
5 computer; and
6 a means for uploading said changes to another portable computer
7 that is different from said server.


1 49. The computerized system of claim 28 further comprising:
2 a means for inputting changes to at least a portion of said computer
3 generated model on said portable computer which is downloaded from
4 said server, said means for inputting being positioned on said portable
5 computer;
6 a means for uploading said changes to said server; and
7 a means for displaying and storing said changes at said server.

1 50. The computerized system of claim 28 further comprising:
2 a means for inputting changes to at least a portion of said computer
3 generated model on said portable computer which is downloaded from
4 said server, said means for inputting being positioned on said portable
5 computer;
6 a means for uploading said changes to another portable computer
7 that is different from said server; and
8 a means for displaying and storing said changes at said another
9 portable computer.

ABSTRACT OF THE DISCLOSURE


A system and method which employ one or more portable hand held computers and one or more servers, allows a field engineer to complete the entire design, deployment, test, optimization, and maintenance cycle required to implement successful communications networks. The portable hand held computer provides the user with a three-dimensional display of the physical environment in which a communications network will be deployed or optimized. The engineer may take the portable hand held computer into the field, and make alterations to the components, position of the components, orientation of the components, etc. based on on-site inspection. As these alterations to the computerized model are made, predictions for the effects these changes will have on the communications network are displayed to the engineer. Measurements may also be made using equipment connected to or contained in the portable hand held computer, and these measurements may be used to optimize performance criteria. Information can be transmitted to and from the portable hand held computer and the server to allow for complex processing to be performed using portable computer. The system allows the engineer to remain in the field while deploying the communications network, making measurements within the network, receiving optimized predictions on the performance of the network, re-configuring the communications network and associated components, and repeating the entire cycle to achieve maximum possible performance with minimal required time or effort.

Figure 1: Portable Handheld Computer

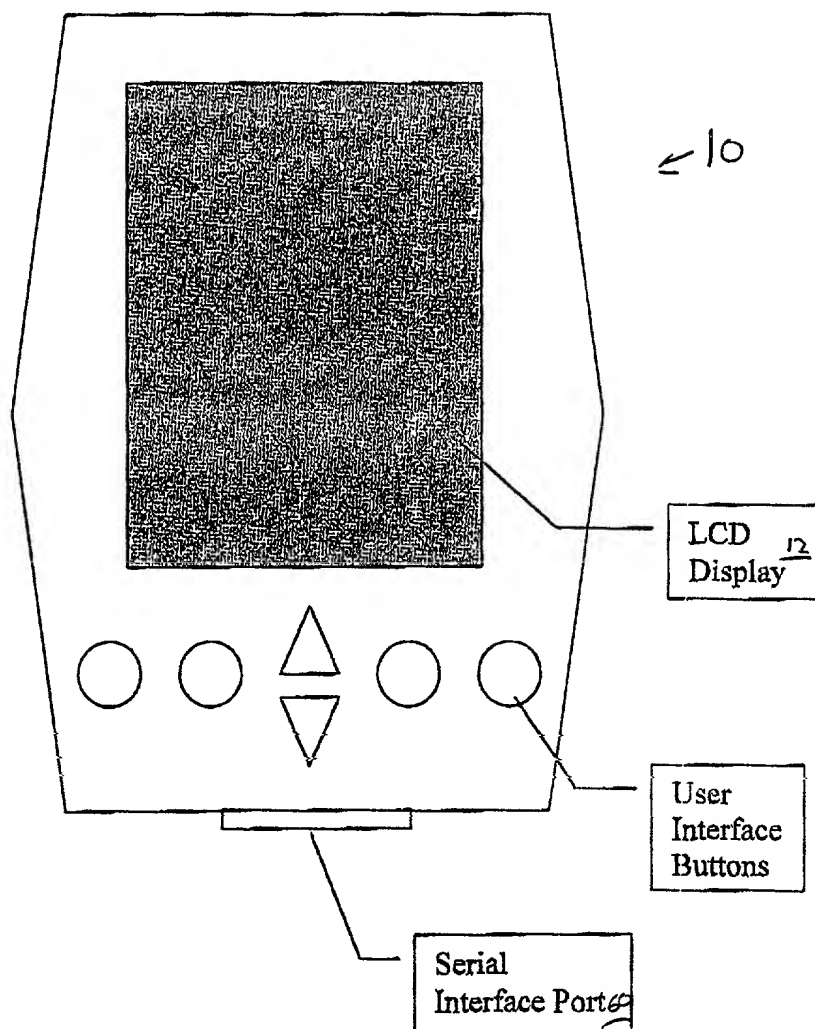


09628506-072800

Figure 2: Visual Campus Database

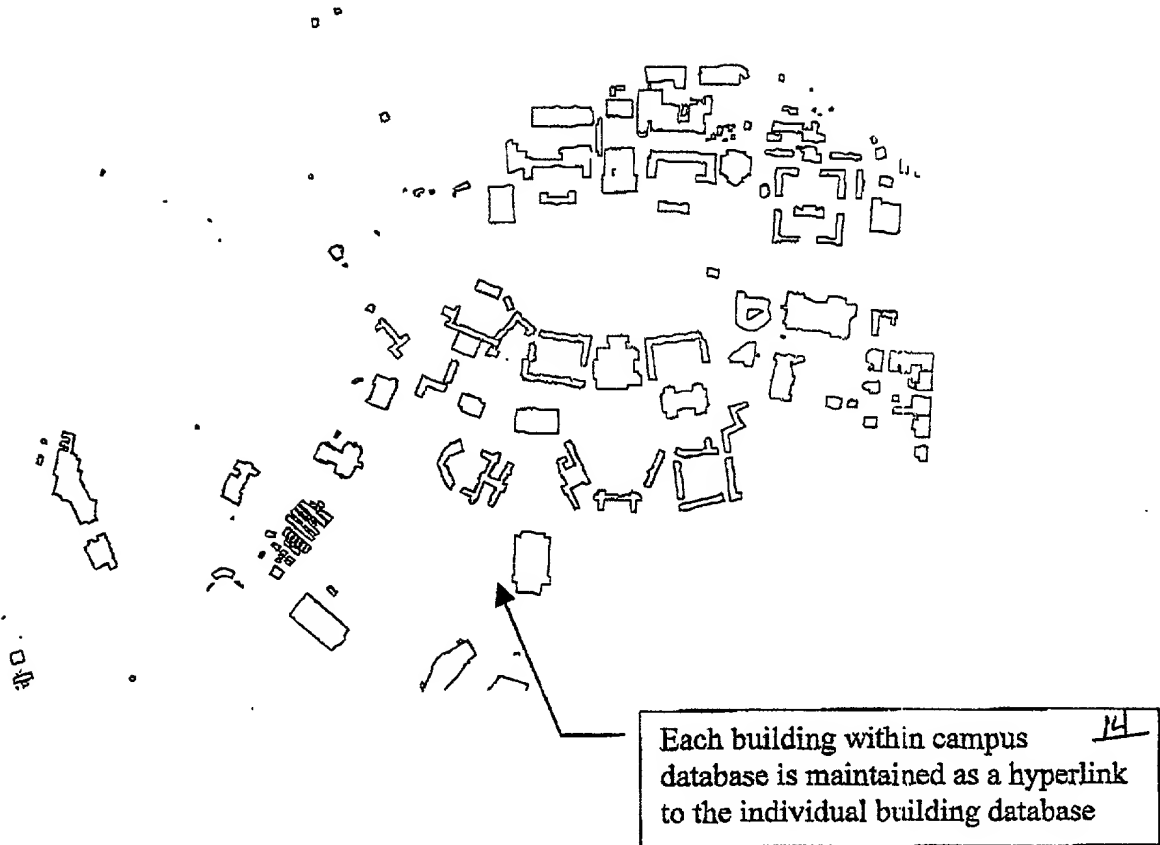


09628506.072800

Figure 3: Docking Cradle Connection

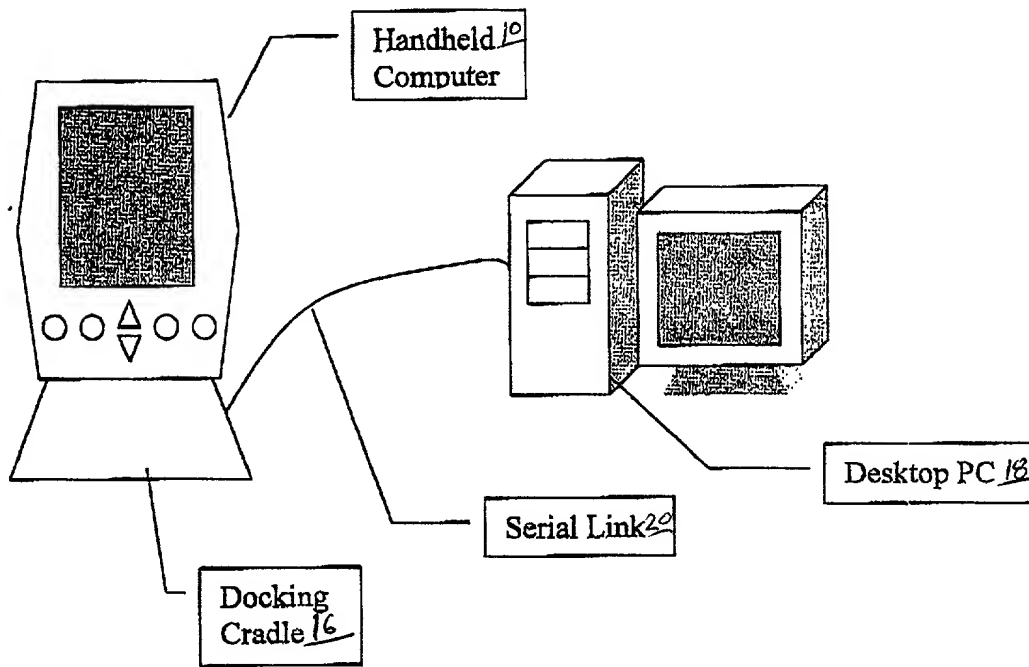

09628506-072800

[illegible]

Study	Year	Age	Sex	Sample Size	Prevalence	95% CI	OR	95% CI
1	1998	15-64	M	1000	1.2	0.5-2.8	1.0	
2	2000	15-64	F	1200	1.5	0.7-3.0	1.2	
3	2002	15-64	M	1100	1.8	0.9-3.5	1.5	
4	2003	15-64	F	1300	2.1	1.1-4.0	1.8	
5	2004	15-64	M	1400	2.5	1.3-4.5	2.2	
6	2005	15-64	F	1500	3.0	1.6-5.5	2.7	
7	2006	15-64	M	1600	3.5	1.9-6.5	3.2	
8	2007	15-64	F	1700	4.0	2.2-7.5	3.7	
9	2008	15-64	M	1800	4.5	2.5-8.0	4.2	
10	2009	15-64	F	1900	5.0	2.8-9.0	4.7	
11	2010	15-64	M	2000	5.5	3.0-10.0	5.2	
12	2011	15-64	F	2100	6.0	3.3-11.0	5.7	
13	2012	15-64	M	2200	6.5	3.6-12.0	6.2	
14	2013	15-64	F	2300	7.0	3.9-13.0	6.7	
15	2014	15-64	M	2400	7.5	4.1-14.0	7.2	
16	2015	15-64	F	2500	8.0	4.4-15.0	7.7	
17	2016	15-64	M	2600	8.5	4.6-16.0	8.2	
18	2017	15-64	F	2700	9.0	4.9-17.0	8.7	
19	2018	15-64	M	2800	9.5	5.1-18.0	9.2	
20	2019	15-64	F	2900	10.0	5.4-19.0	9.7	
21	2020	15-64	M	3000	10.5	5.7-20.0	10.2	
22	2021	15-64	F	3100	11.0	6.0-21.0	10.7	
23	2022	15-64	M	3200	11.5	6.3-22.0	11.2	
24	2023	15-64	F	3300	12.0	6.6-23.0	11.7	
25	2024	15-64	M	3400	12.5	6.9-24.0	12.2	
26	2025	15-64	F	3500	13.0	7.2-25.0	12.7	
27	2026	15-64	M	3600	13.5	7.5-26.0	13.2	
28	2027	15-64	F	3700	14.0	7.8-27.0	13.7	
29	2028	15-64	M	3800	14.5	8.1-28.0	14.2	
30	2029	15-64	F	3900	15.0	8.4-29.0	14.7	
31	2030	15-64	M	4000	15.5	8.7-30.0	15.2	
32	2031	15-64	F	4100	16.0	9.0-31.0	15.7	
33	2032	15-64	M	4200	16.5	9.3-32.0	16.2	
34	2033	15-64	F	4300	17.0	9.6-33.0	16.7	
35	2034	15-64	M	4400	17.5	9.9-34.0	17.2	
36	2035	15-64	F	4500	18.0	10.2-35.0	17.7	
37	2036	15-64	M	4600	18.5	10.5-36.0	18.2	
38	2037	15-64	F	4700	19.0	10.8-37.0	18.7	
39	2038	15-64	M	4800	19.5	11.1-38.0	19.2	
40	2039	15-64	F	4900	20.0	11.4-39.0	19.7	
41	2040	15-64	M	5000	20.5	11.7-40.0	20.2	
42	2041	15-64	F	5100	21.0	12.0-41.0	20.7	
43	2042	15-64	M	5200	21.5	12.3-42.0	21.2	
44	2043	15-64	F	5300	22.0	12.6-43.0	21.7	
45	2044	15-64	M	5400				




Figure 6: Editing an Antenna Configuration in 3D

Figure 6a



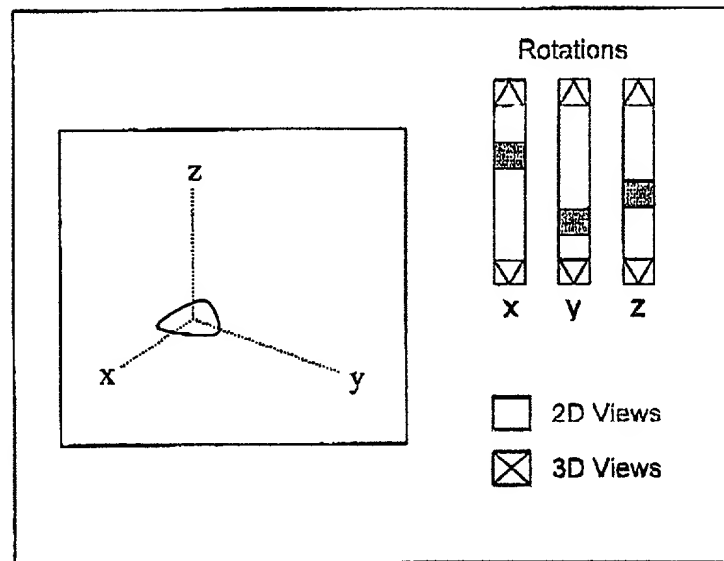


Figure 6b

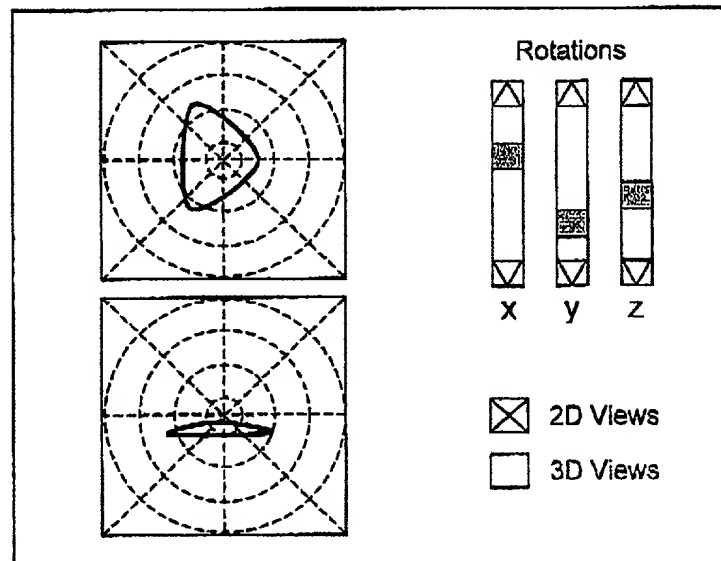


09628506-072800

Figure 7: Translatingan Object

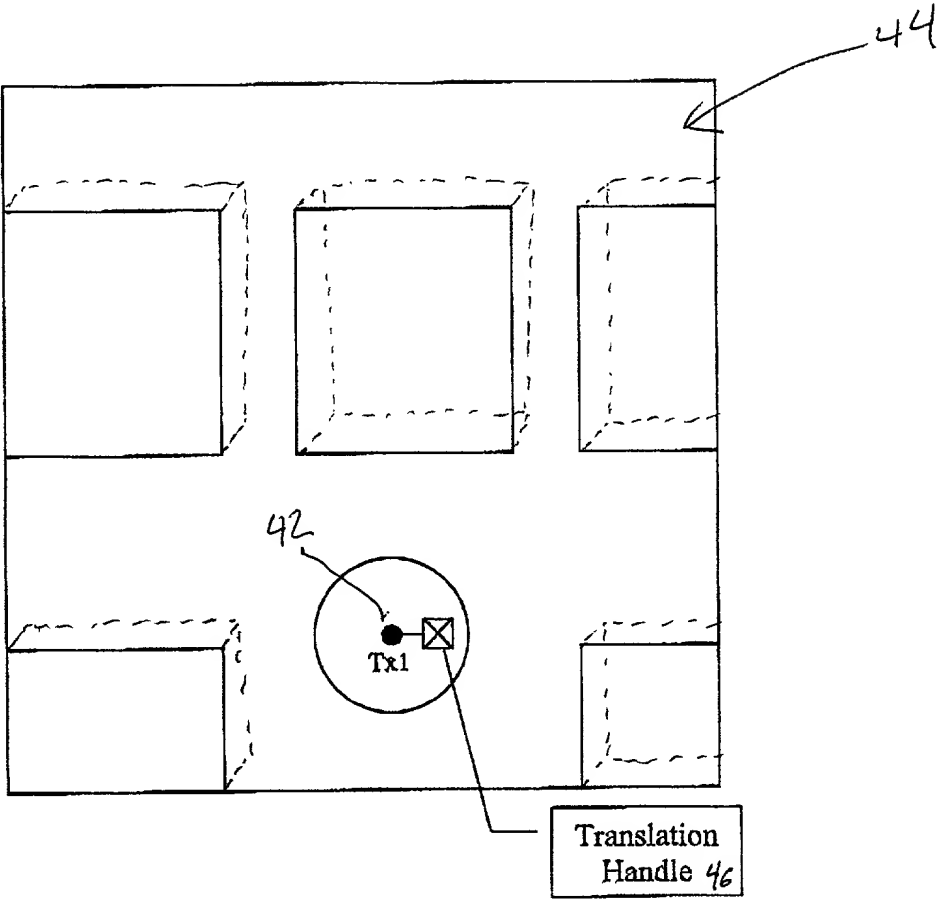


09628506-072800

Figure 8: Altering a Component's Layout

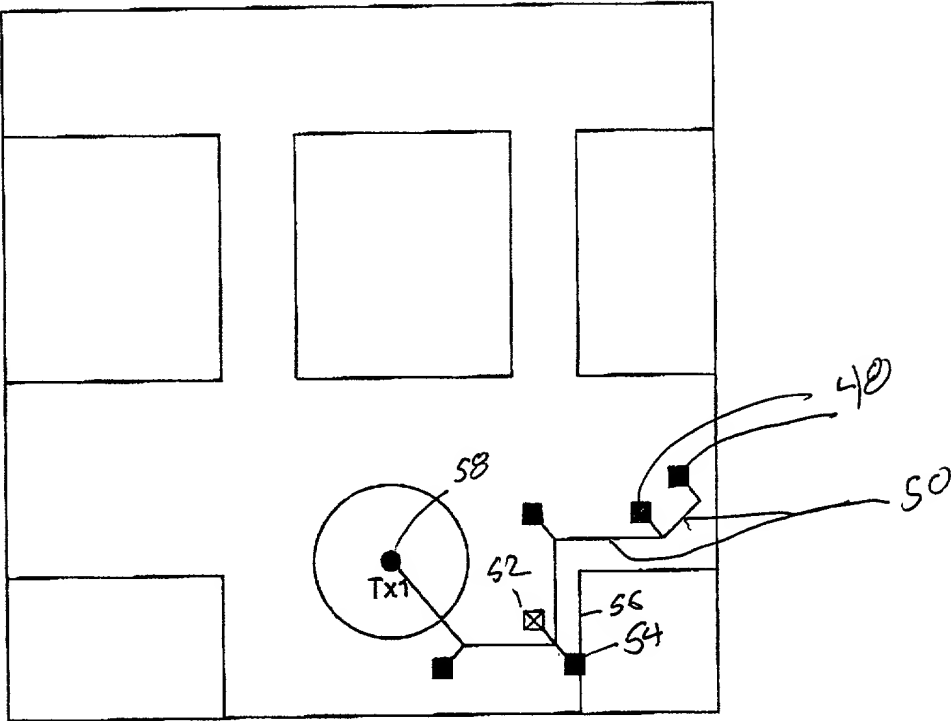


09628506-072800

Figure 9: Portable Handheld Computer to Desktop PC Link

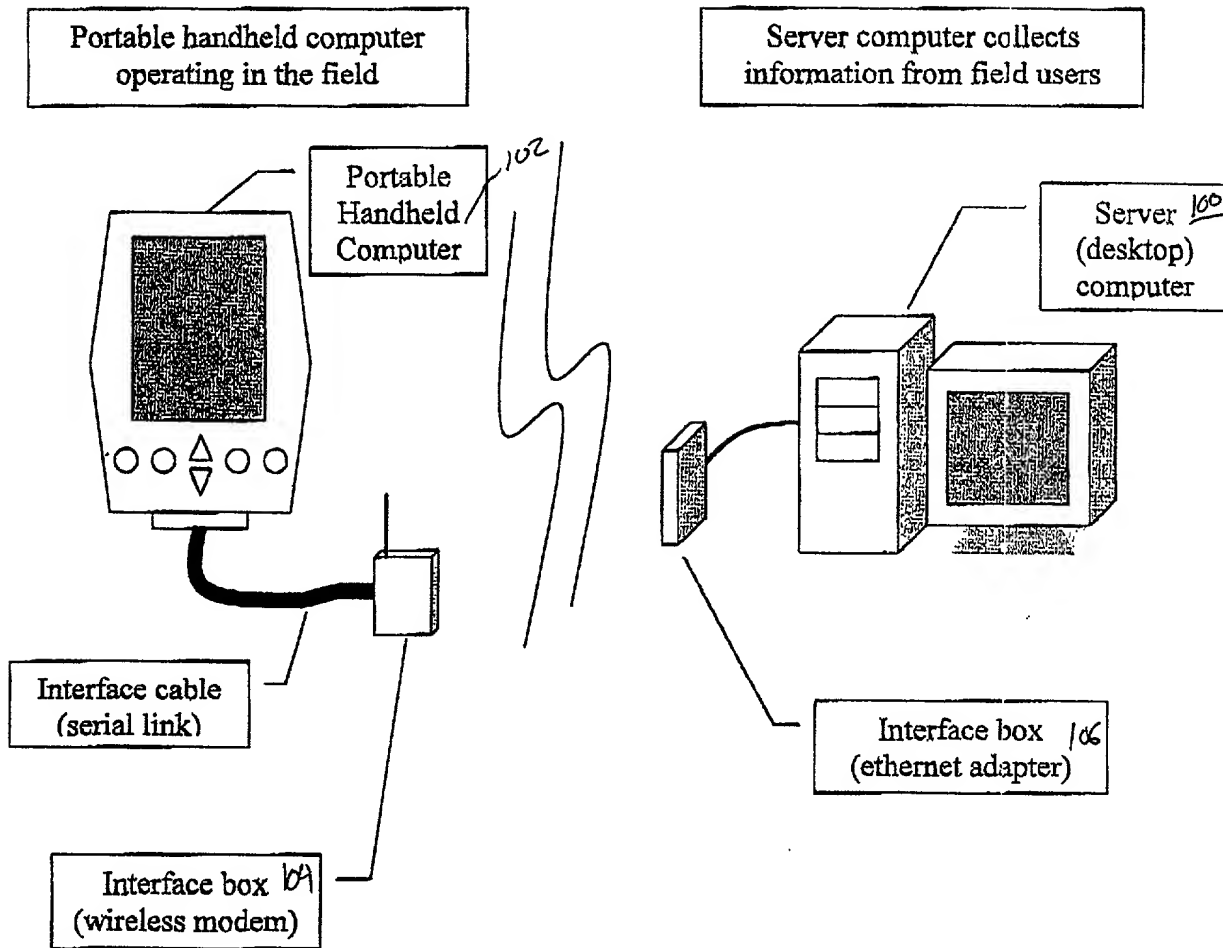

09628506-072800

Figure 10: Portable Handheld Computer Connected to a Measurement Device

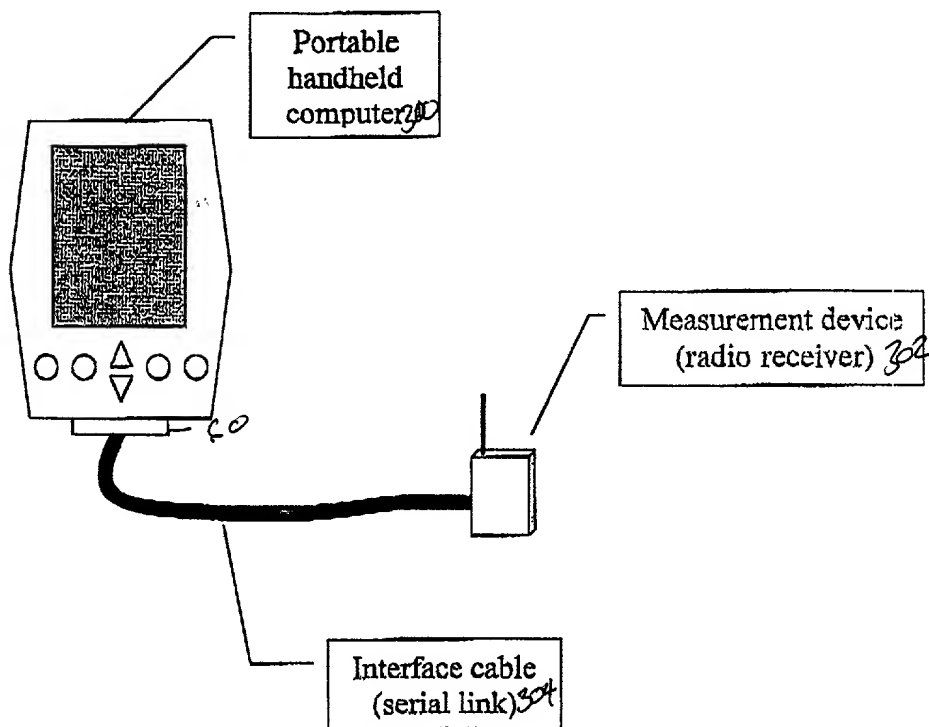

09628506-072800

02560028AA

Application for United States Patent

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
**SYSTEM, METHOD, AND APPARATUS FOR PORTABLE DESIGN, DEPLOYMENT, TEST, AND OPTIMIZATION
 OF A COMMUNICATION NETWORK**

the specification of which:

(check one) ☒ is attached hereto
☐ was filed on _____, as
 Application Serial No. _____
 and was amended on _____
 (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56*

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			priority claimed	
(Number)	(Country)	(Day/Month/Year Filed)	yes	no
(Number)	(Country)	(Day/Month/Year Filed)	yes	no
(Number)	(Country)	(Day/Month/Year Filed)	yes	no

I hereby claim the benefit under Title 35, United States Code, § 119 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
--------------------------	---------------	--

Power of Attorney: As a named inventor, I hereby appoint C. Lamont Whitham, Reg. No. 22,424, Marshall M. Curtis, Reg. No. 33,138, Michael E. Whitham, Reg. No. 32,635 and Joseph M. Martinez de Andino, Reg. No. 37,178 as attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. All correspondence should be directed to McGuireWoods, 1750 Tysons Boulevard, Suite 1800, Tysons Corner, McLean, Virginia 22102-3915. Telephone calls should be directed to McGuireWoods, LLP at (703) 391-2510.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole

or First Inventor: Theodore S. RappaportInventor's Signature *Theodore S. Rappaport*Date: July 28, 2000Residence: 1770 St. Andrew's Circle, Blacksburg, VA 24060 816 Pendleton Drive, SALEM, VA 24153Citizenship: United States of AmericaPost Office Address: Same as above

Full Name of Second

Joint Inventor: Brian T. GoldInventor's Signature *Brian T. Gold*Date: July 28, 2000Residence: 610 Green Street, Blacksburg, VA 24060Citizenship: United States of AmericaPost Office Address: Same as above

Full Name of Third

Joint Inventor: Roger R. SkidmoreInventor's Signature *R. Skidmore*Date: July 28, 2000Residence: 407 Hunt Club Drive 371, Blacksburg, VA 24060Citizenship: United States of AmericaPost Office Address: Same as above

*Title 37, Code of Federal Regulations, § 1.56:

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith toward the Patent and Trademark Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability; or (2) it refutes, or is inconsistent with, a position the applicant takes in: (i) opposing an argument of unpatentability relied on by the Office, or (ii) asserting an argument of patentability.

00628506 "072800